

Communication Networks (0368-3030) / Spring 2011

The Blavatnik School of Computer Science,
Tel-Aviv University

Allon Wagner




Error Detection and Correction

Kurose & Ross, Chapter 5.2 (5th ed.)

Error Detection

EDC= Error Detection and Correction bits (redundancy)
D = Data protected by error checking, may include header fields

- Error detection not 100% reliable!
 - protocol may miss some errors, but rarely
 - larger EDC field yields better detection and correction

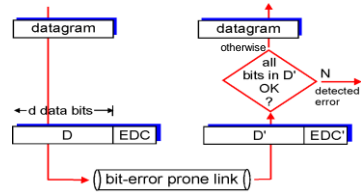


Data Link Layer 5-3



Example – Parity bit

- Assume D has d bits.
- The EDC is one bit s.t. the number of 1's in the $d+1$ bits (D and the EDC) is even.
- Receiver can detect an error inverting an odd number of bits
- Example:
 - D = 11101
 - Sender sends 111010
 - Receiver gets 101010
 - Illegal parity – an error has occurred
 - Receiver cannot correct the error



Error detection vs. Error correction



Some theory

- Assume all messages are of size d
 - We have 2^d possible messages, all of them valid
 - When some bits flip, the receiver still gets a valid message
 - It cannot know there was an error
- The proposed solution:
 - Add r bits of *redundancy*.
 - Now, we have 2^{d+r} possible messages, but only 2^d of them are valid (these are called *codewords*).
 - "Small errors" are likely to transform the valid message into an invalid one, so that the receiver knows an error has occurred.

Some theory (cont.)

- **Definition:** The *Hamming-distance* of two strings x and y is the number of bits in which they differ, denoted $dH(x,y)$.
 - For instance: $x = 110010$ $y = 111000$. $dH(x,y) = 2$
- **Definition:** The *Hamming-distance of an error-correction scheme* (= code) is the minimal Hamming-distance between two valid messages (= codewords).
 $dH(C) = \min \{ dH(x,y) : x, y \in C \}$

Parity bit revisited

- Assume all messages have d bits.
- The valid messages (= codewords) are all the $d+1$ messages s.t their total number of 1's is even.
- The Hamming-distance of this scheme is 2.
 - No two valid codewords x,y s.t. $dH(x,y) = 1$
 - If $dH(x,y) = 1$ then either x or y has an odd number of 1's.
 - There are two valid codewords with distance 2:
 - For instance, for $d = 6$
 $x = 111100$ $y = 111111 \rightarrow dH(x,y) = 2$

Why is Hamming-distance important?

- Theorem 1: If a code C has $dH(C) = k+1$, then it can **detect** all errors of k bits or less.
 - Such errors necessarily produce an invalid codeword
- Theorem 2 : If a code C has $dH(C) = 2k+1$, then it can **correct** all errors of k bits or less.
 - Think why
- And indeed: parity bit can detect all single-bit errors, but cannot correct any.

CRC – Cyclic Redundancy Check

- Bits represent polynomials over $GF(2)$
 - Example: $100101 = x^5 + x^2 + 1$
 - Addition and subtraction are actually XOR (no carry)
 - Example: $1101 + 0111 = 1010$
 $(x^3 + x^2 + 1) + (x^2 + x + 1) = x^3 + x$
- Sender & receiver agree in advance on a **generating polynomial** G of degree r
- When sender wish to send D , it calculates R s.t. DR is divisible by G .
- When the receiver gets $D'R'$ it divides it by G . If the remainder is not 0 – an error has occurred.

Calculating R

- $DR = x^r \cdot D + R$
- We want: $DR = x^r \cdot D + R = n \cdot G$
 - But addition and subtraction are just XOR – they are interchangeable
- Equivalently, then, we want: $x^r \cdot D = n \cdot G + R$
- Namely, R is the remainder of $x^r \cdot D$ divided by G !
- Observation: R 's degree is at most $r-1$.
 - It is the remainder of dividing by G , and $deg(G) = r$

CRC Example

- $D = 101110 = x^5 + x^3 + x^2 + x$
- $G = 1001 = x^3 + 1$
 - $r = deg(G) = 3$
- Shift D r bits to the left:
 - $x^r \cdot D = x^8 + x^6 + x^5 + x^4$
 - $x^r \cdot D = 101110000$
- Now we can divide $x^r \cdot D$ by G :
 - on board

CRC Example

Want:

$$D \cdot 2^r \text{ XOR } R = nG$$


equivalently:

$$D \cdot 2^r = nG \text{ XOR } R$$

equivalently:

if we divide $D \cdot 2^r$ by G , want remainder R

$$R = \text{remainder} \left[\frac{D \cdot 2^r}{G} \right]$$



CRC Example (cont.)

- $D = 101110 = x^5 + x^3 + x^2 + x$
- $G = 1001 = x^3 + 1$
 - $r = \deg(G) = 3$
- Now we can divide $x^r \cdot D$ by G :
 - we get: $R = x + 1 = 011$
- Sender sends:
 - $DR = x^r \cdot D + R = 101110011$

Ethernet's CSMA/CD

Kurose & Ross, Chapter 5.5.2 (5th ed.)

The algorithm

When a the network layer generates a new frame:

1. If the adapter senses the channel to idle (that is no signal detected for 96 bit times) – start transmitting the frame
2. Otherwise (channel is busy) – wait until you sense no signal energy (plus 96 bit times) and then start transmitting
3. While transmitting – listen for signal coming from other adapters. If the adapter transmitted the entire frame without detecting signal energy – it is done with the frame.
4. If signal energy is detected while transmitting – stop transmitting the frame.
 - i. Transmit a 48 bit jam-signal
 - ii. Exponential backoff: after experiencing the n -th collision is a row for the current frame choose K randomly from $\{0, 1, \dots, 2^n - 1\}$ with $m = \min\{n, 10\}$. Wait $K \cdot 512$ bit times and return to step 1.

The jam signal

- The jam-signal makes sure all other transmitting adapters are aware of the collision
 - Suppose that A starts to transmit
 - Just before A's signal reaches B, B begins to transmit
 - B senses A's signal and aborts.
 - B transmitted just a few bits before aborting. These bits propagate to A but might not constitute enough energy for A to detect the collision!
 - To make sure A detects the collision, B transmits the 48-bit jam signal

Exponential backoff

- When an adapter first detects collision, it cannot know how many adapters are involved in the collision,
- Exponential backoff dynamically adapts the waiting-time before reattempting transmission to the number of adapters involved in the collision
 - Few adapters involved: Choose K from a small set, so that no one waits unnecessarily
 - Many adapters involved: Choose K from a large set, so everyone is likely to choose a different time to transmit, and the collision will be resolved.

Exponential backoff example

- Assume A and B both have a new frame to transmit. They both begin to transmit exactly on the same time and collide.
- They both choose K from $\{0, 1\}$
- The possible outcomes:

Exponential backoff example (cont.)

Case	A chooses	B chooses	Probability	Outcome
(a)	0	0	0.25	another collision on round 2
(b)	0	1	0.25	A successful on round 2, B successful on round 3
(c)	1	0	0.25	B successful on round 2, A successful on round 3
(d)	1	1	0.25	another collision on round 3